

## Technical Specifications

<b>Power Supply</b>	6 ... 30VDC
<b>Power Consumption</b>	typ. 89mW, max. 121mW
<b>Total Power Loss</b>	max. 121mW
<b>Safety Rating</b>	IP30
<b>Capacitive Touch</b>	5 Touch Points, capacitive touch detection
<b>Ambient Temperature</b>	-20...70°C / -4...158°F
<b>Temperature Detection Range</b>	-40...125°C / -40...257°F +/- 0.5°C / 0.9°F
<b>Humidity Detection Range</b>	0...100% r.H. +/- 2% (non-condensing)
<b>Dimensions</b>	104x44.5x18.9mm / 4.09x1.75x0.74" (LxWxH)
<b>Maintenance &amp; Cleaning</b>	This device is free of maintenance and may only be cleaned with a dry cloth.

## Connection

<b>Wire conductor cross-section</b>	0.25 ... 0.8mm <sup>2</sup> / AWG23 ... AWG18
<b>Stripping Length</b>	5mm / 0.2"

# LOXONE

**Loxone  
Electronics GmbH**  
Smart Home 1  
4154 Kollerschlag  
Austria



For additional information,  
declaration of conformity, visit  
[www.loxone.com/datasheets](http://www.loxone.com/datasheets)

V190924



**Need Help?**  
[loxone.com/support](http://loxone.com/support)

# LOXONE



## Touch Tree

Part No: 100425 (White)

## About the product



The Loxone Touch has five touch zones, which can be configured according to your needs. The large central touch zone is ideal for controlling lighting, whilst the corner zones are handy for controlling music and blinds, for example.

## Features

- 5 touch buttons
- Temperature & humidity sensor
- Optional click feedback

## Installation

Install the mounting frame on the desired installation place. Power up the device and pair it with your Miniserver in Loxone Config.

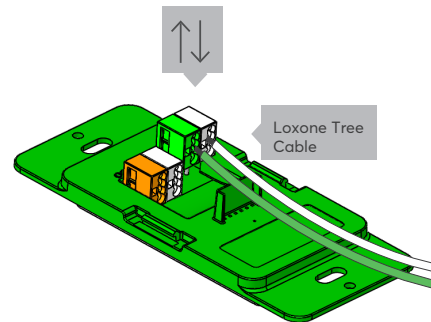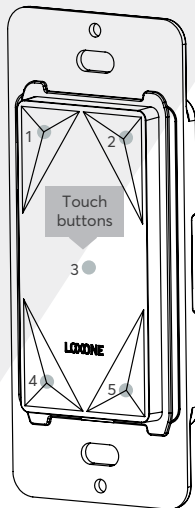

This folder is a part of the product!



For additional information,  
visit [www.loxone.com/help/touch-tree-us](http://www.loxone.com/help/touch-tree-us)